

On-board Credentials

N. Asokan

Nokia Research Center, Helsinki

Joint work with Jan-Erik Ekberg, Kari Kostianen, Pekka Laitinen, Aarne Rantala (VTT)

NOKIA

Padova, July 2012


Outline

- On-board Credentials (ObCs): What and Why
- ObC Architecture
- Secure Provisioning of ObCs
- Instantiations of the Architecture
- Deployment Considerations
- ObCs in Action
- Status

On-board Credentials: What and Why


On-board Credentials (ObCs)

open
An credential platform that leverages on-board trusted execution environments

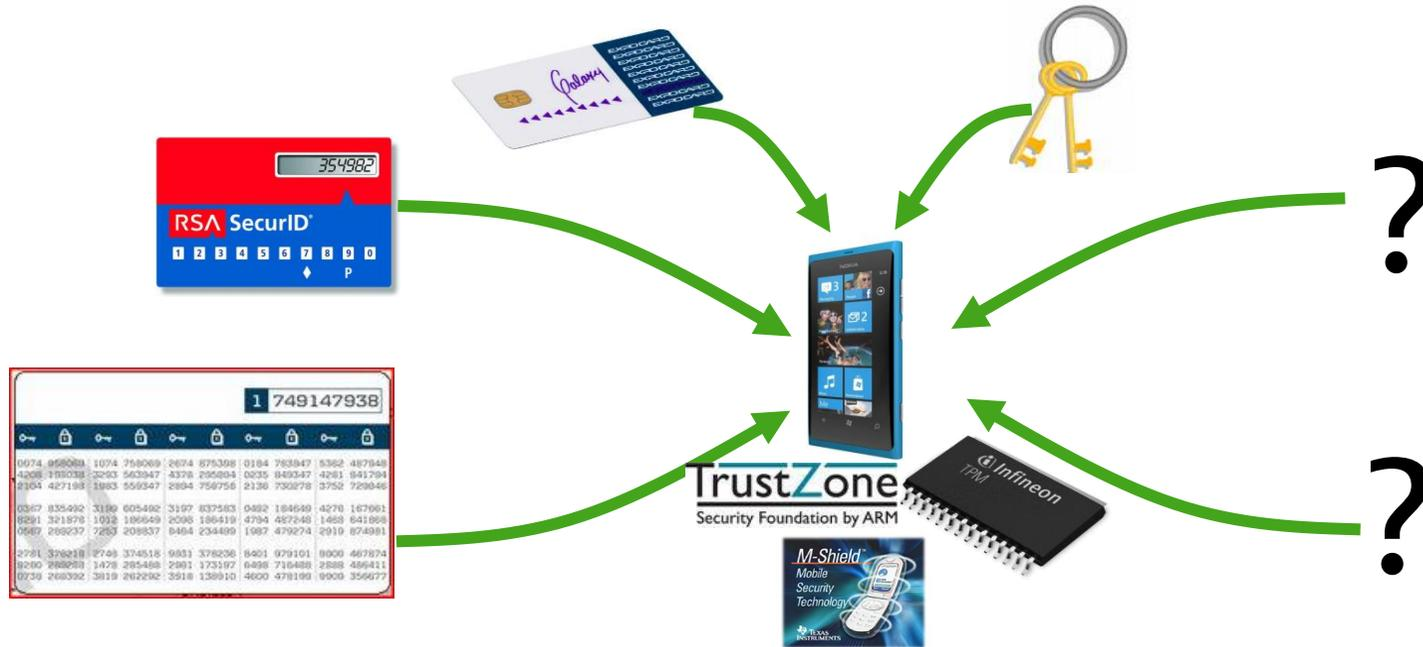

Secure yet inexpensive

On-board user credentials: what and why

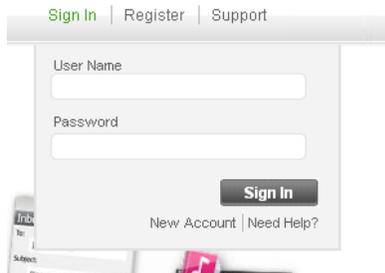

Sign In | Register | Support

User Name
Password

Sign In

New Account | Need Help?



Google Account
Username: [input]
Password: [input]

Remember me
Sign in

Password Required
Please enter the master password for the Software Security Device.

OK Cancel



SW-only credentials

- Easy, cheap, flexible
- Insecure

Dedicated HW credentials

- Secure, intuitive
- Expensive, inflexible, single-purpose

Like multi-application smartcards, but without issuer control.

On-board user credentials: design goals

- Credential programs can be **executed securely**
 - Use a trusted execution environment (TEE)
- Credential **secrets can be stored securely**
 - Use a device-specific secret in TEE for secure storage
- **Anyone can create and use** new credential types
 - Need a security model to strongly isolate credential programs from one another
 - Avoid the need for centralized certification of credential programs
- **Anyone can provision credential secrets** securely to a credential program
 - Need a mechanism to create a secure channel to the credential program
 - (certified) device keypair; unique identification for credential programs
- Protection of asymmetric credentials is **attestable to anyone**
 - Anyone can verify that a private key is protected by the TEE


Credential = program + secret

ObC Architecture

ObC Architecture

On Trusted Execution Environments (TEEs) with

- Secure execution (within TEE)
- Secure storage (secret key OPK in TEE)
- Certified device keypair (PK_{dev}/SK_{dev} in TEE)
- Source of randomness

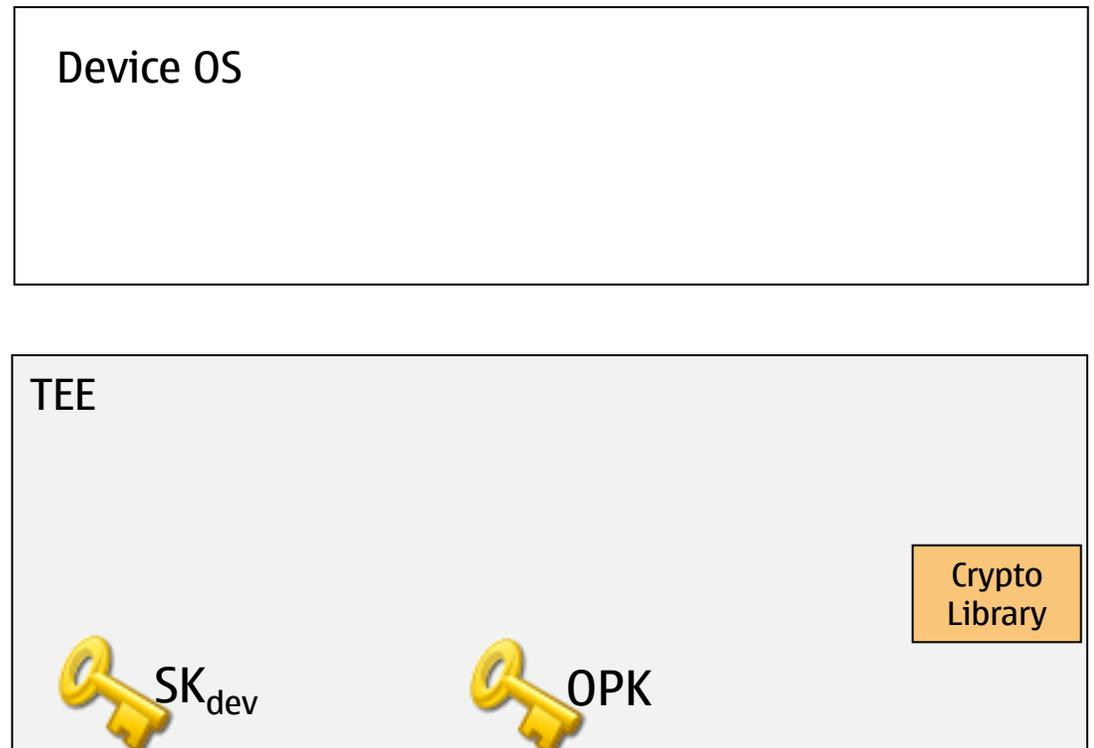

ObC Architecture


Credential = program + secret

On Trusted Execution Environments (TEEs) with

- Secure execution within TEE
- Secure storage (at least a secret key OPK in TEE)
- Certified device keypair (PK_{dev}/Sk_{dev} in TEE)
- Source of randomness

```
function main()
  read_array(IO_PLAIN_RW, 0, data)
  read_array(IO_SEALED_RW, 1, key)
  aesenc(cipher, data, key)
  write_array(IO_PLAIN_RW, 0, cipher)
  return 0
end
```

More in [ACM ASIACCS '09 paper](#)

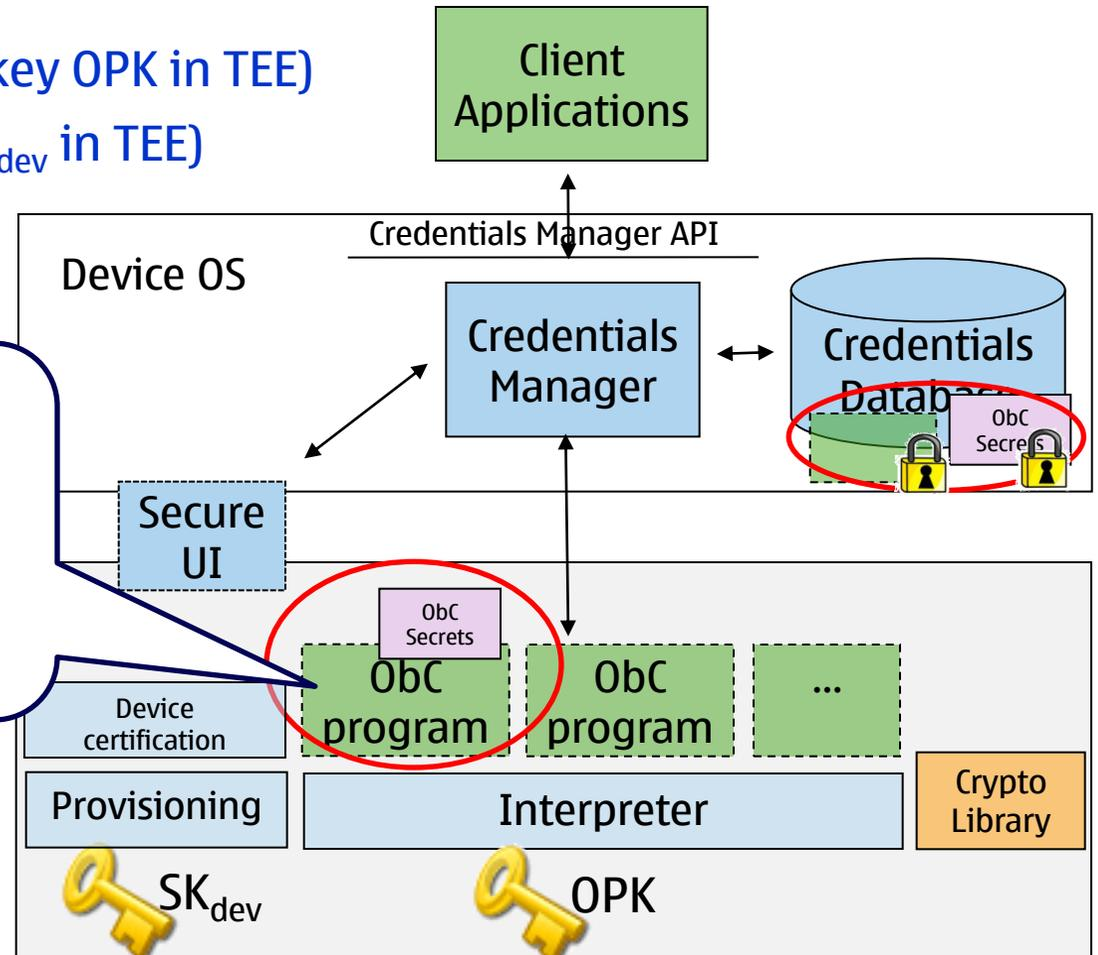

Isolation of ObC Programs

Isolating the platform from programs

- Constraining the program counter, duration of execution, ...


Isolating programs from one another

- Only one ObC program can execute at a time
- An ObC program can “seal” data for itself
 - Sealing key is different for every independent ObC program
Sealing-key = KDF (OPK, program-hash)
 - A program can invoke functions like “seal(data)” (unsealing happens automatically on program loading)

Secure Provisioning of ObCs


Requirements for Provisioning Credential Secrets

- Provisioning protocols typically focus on **user authentication** only
 - CT-KIP, Open Mobile Alliance Device Management (OMA DM), ...
- IETF keyprov working group is defining Dynamic Symmetric Key Provisioning Protocol (DSKPP)
 - Allows **device authentication** as well
- We need more...
 - provision a key so that it can be accessed by **specific credential programs**
- Subject to...
 - “**Anyone can provision credential secrets** securely to a credential program”
 - Support for multiple versions of credential programs
 - Support for several co-operating credential programs

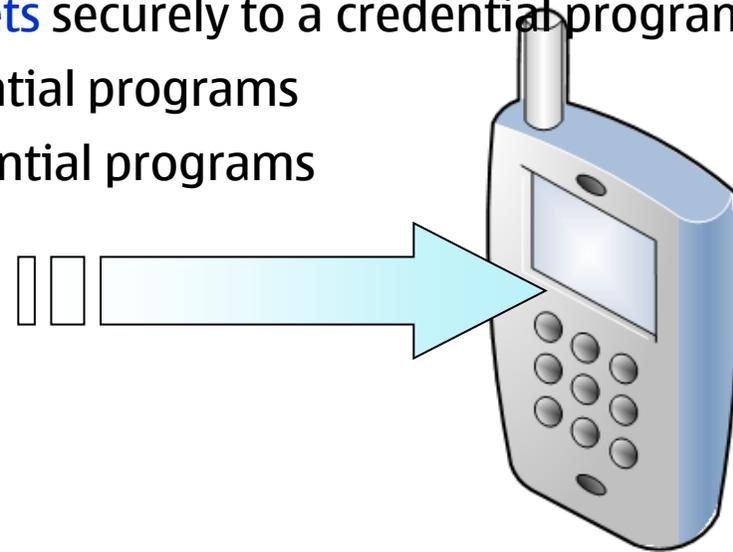

Provisioning credential secrets (1/4)


Basic Idea: the notion of a **family** of credential secrets and credential programs endorsed to use them

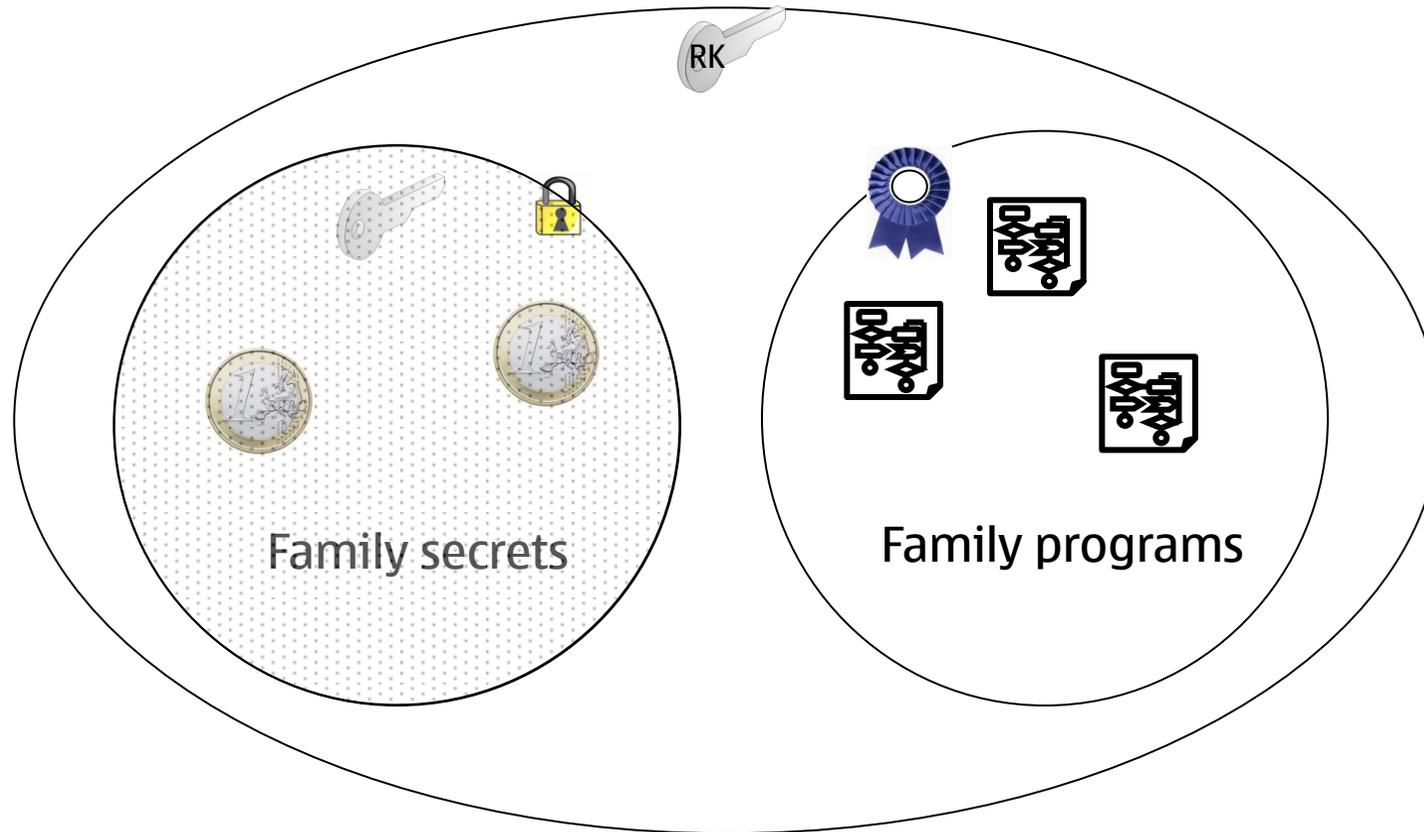


Provisioning credential secrets (2/4)

- Provision a family **root key** to the device
 - using *authentic device public key* PK_{Dev}
- Transfer encrypted credential secrets
 - using authenticated encryption (AES-EAX) with RK
- Endorse credential programs for family membership
 - Program ID is a cryptographic hash of program text
 - using authenticated encryption (AES-EAX) with RK

ObCP/Init

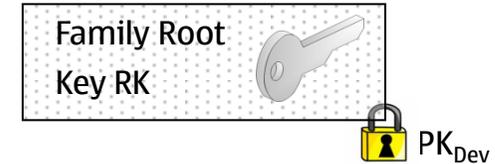

ObCP/Xfer

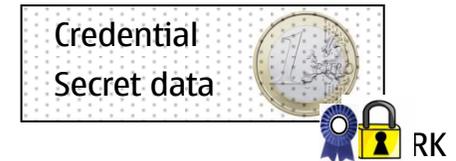


ObCP/Endorse



Provisioning credential secrets (3/4)

- Anyone can define a family by provisioning a root key (“Same Origin” policy)
- Multiple credential secrets and programs can be added to a family
- Credential Programs can be encrypted as well

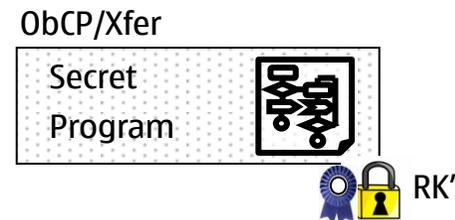

Provisioning credential secrets (4/4)

Verifies $Cert_D$, Creates new RK

$Init = Enc(PK_D, RK)$

$Xfer = AE(RK, secret)$

$Endorsement = AE(RK, hash(program))$

$LFK = KDF(RK, OPK)$

$LEK = KDF(OPK, hash(program))$

$ET = AE(LEK, LFK)$

Credential issuer

$PK_D, Cert_D$

Init, Xfer, Endorsement

$PK_D/SK_D =$ device keypair

$Cert_D =$ manufacturer certificate for PK_D

$RK =$ family root key

$LFK =$ local family key


$LEK =$ local endorsement key

$ET =$ endorsement token

$Enc =$ public key encryption


$AE =$ authenticated encryption

$KDF =$ key derivation function

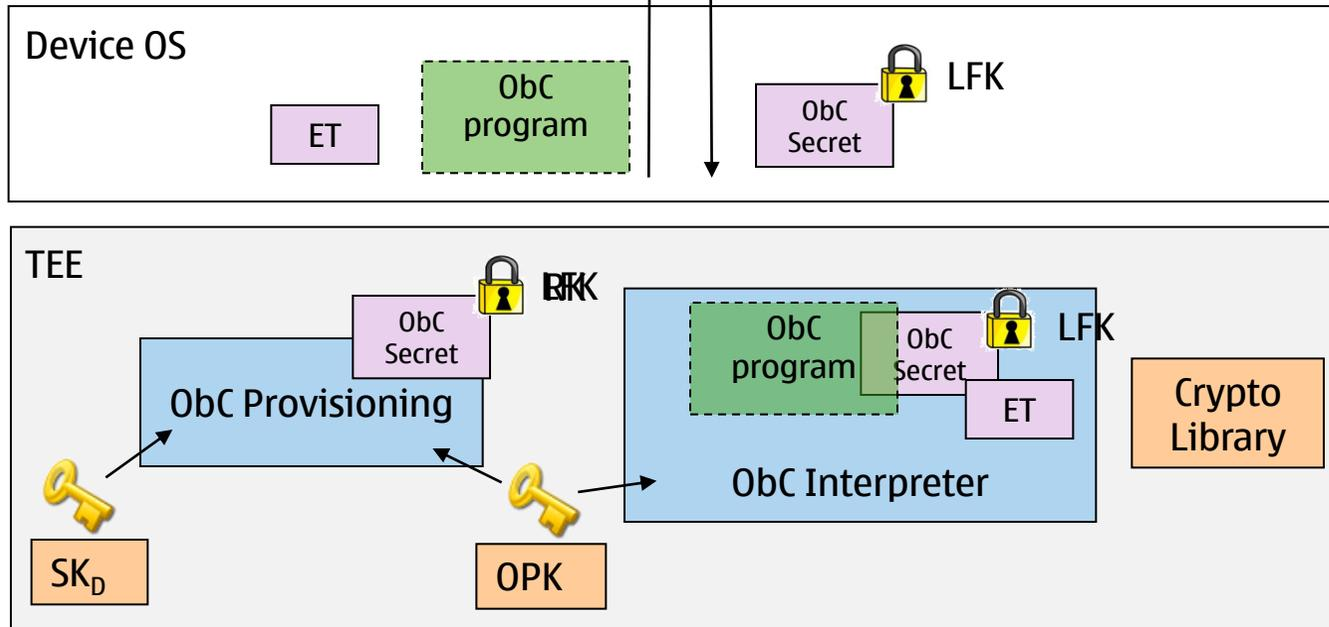

Separating provisioning from use:
No public key operations by the Interpreter during credential use

Asymmetric ObCs

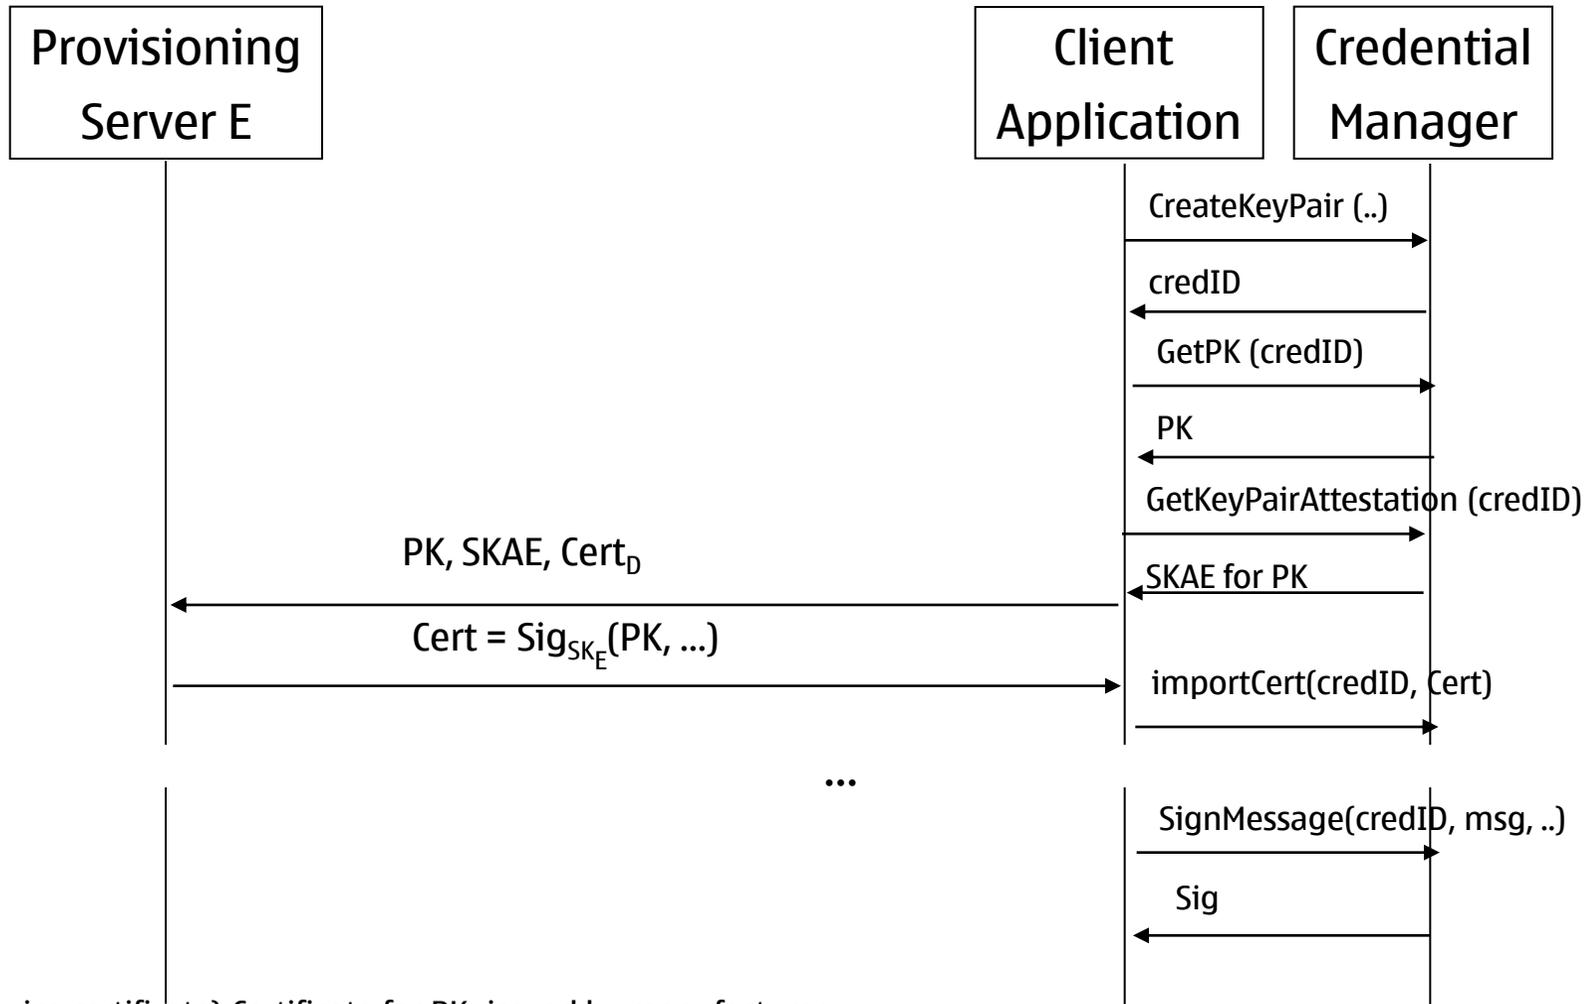

Cert_D (Device certificate) Certificate for PK_D issued by manufacturer

SKAE (Subject Key Attestation Evidence) for PK: Signature on PK issued by SK_D, attesting that SK is within the TEE

Instantiations of the Architecture

M-Shield™: Example hardware TEE #1

M-Shield provides


- Secure boot
- Chip-specific secret key (e-fuse)
- Secure execution of certified “Protected Applications” (PAs)
- On-chip RAM for PAs
- ... (hardware RNG, crypto accelerators, ...)



http://focus.ti.com/pdfs/wtbu/ti_mshield_whitepaper.pdf

ObC on Symbian/M-Shield secure h/w (2007-2009)

- M-Shield secure boot used for validation of OS
- Interpreter , Provisioning subsystem are PAs
 - Use on-chip RAM
- OPK from chip-specific secret
- Device key pair
 - generated by Prov. PA
 - protected by chip-specific secret key
 - [certified by manufacturer]

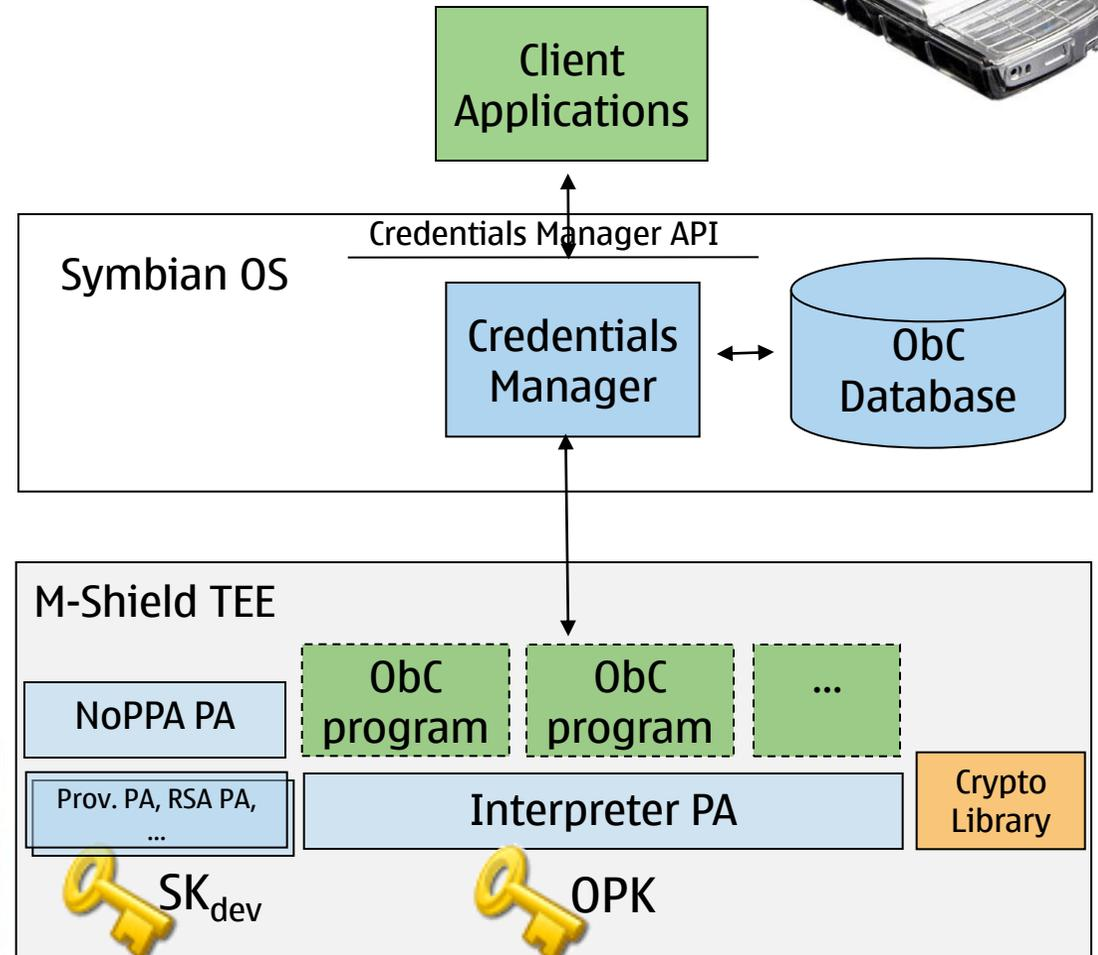

TPM: Example hardware TEE #2

TPM provides


- Authenticated boot
 - Components during boot measured and recorded in Registers (PCRs) within TPM
 - A set of PCR values = a “configuration”
- Secure storage for keys bound to a specific configuration
- Ability to seal arbitrary data bound to a specific configuration
- Secure execution of selected cryptographic operations
- ... (remote attestation, ...)



ObC using Linux/TPM (2006, 2009)



- Interpreter in kernel module on InitRD
- KeyInitializer in InitRD creates OPK on first use and seals for current configuration
- KeyInitializer unseals OPK on subsequent invocations.
- Security of execution improved using dynamic root of trust (2009): Flicker "PAL" instead of kernel module.


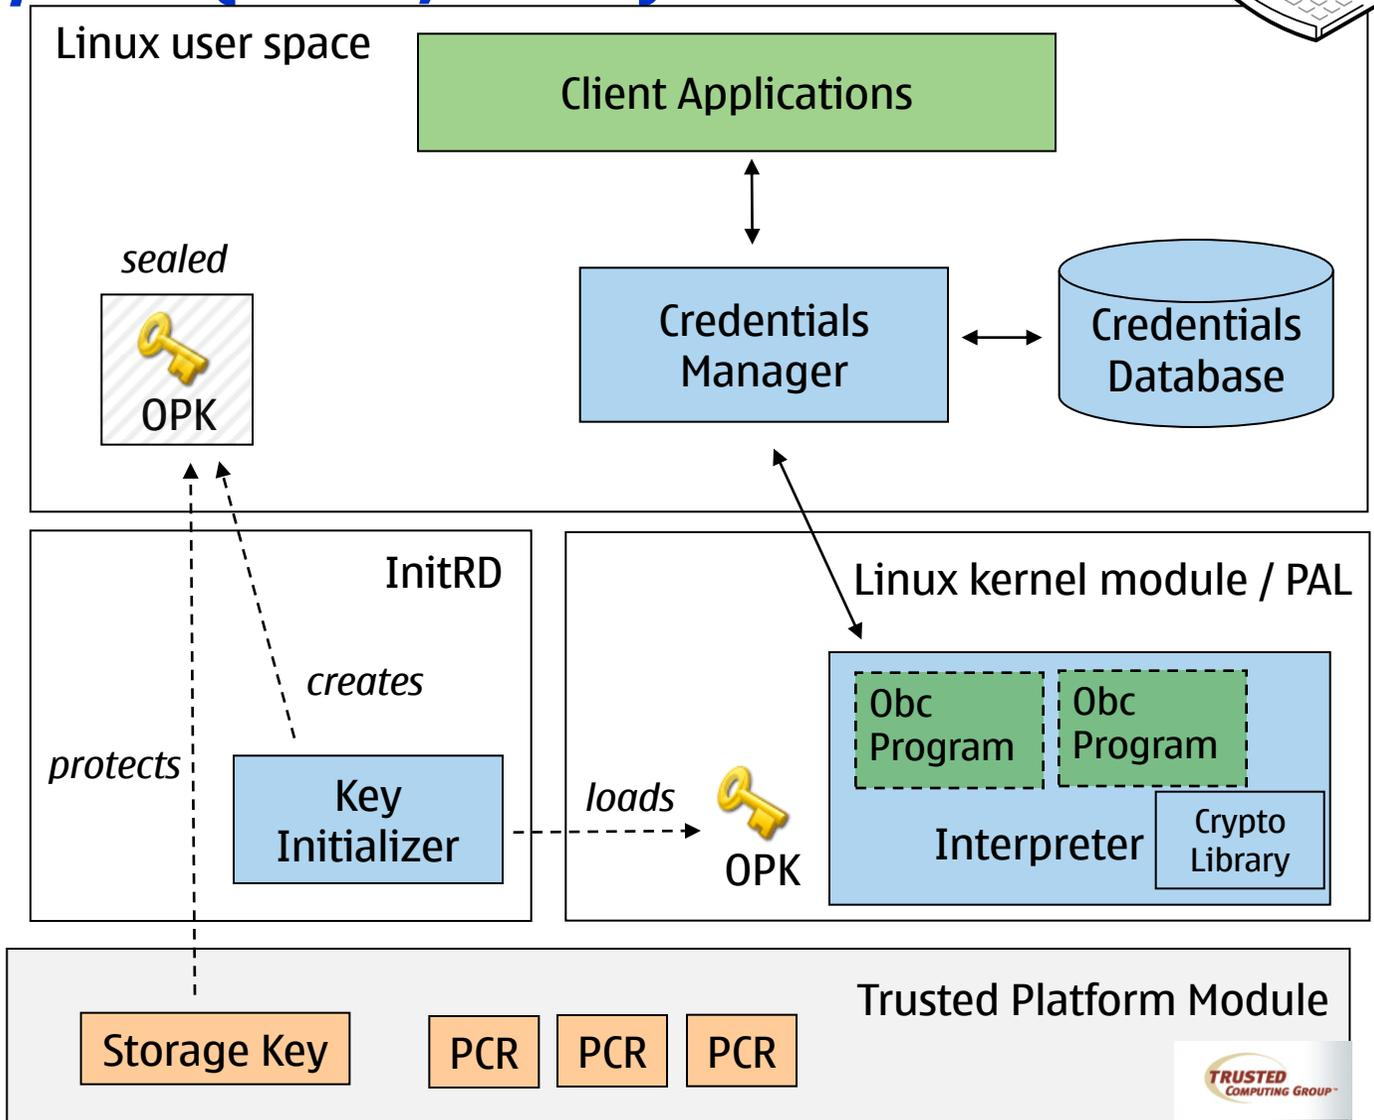


MSc thesis work:

<http://asokan.org/asokan/research/Aish-Thesis-final.pdf>



ObC on Maemo/TrustZone secure h/w (2009-2010)

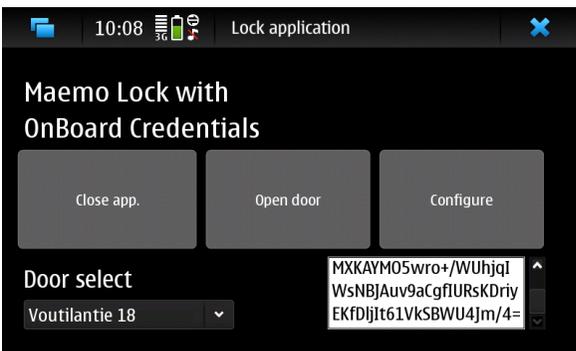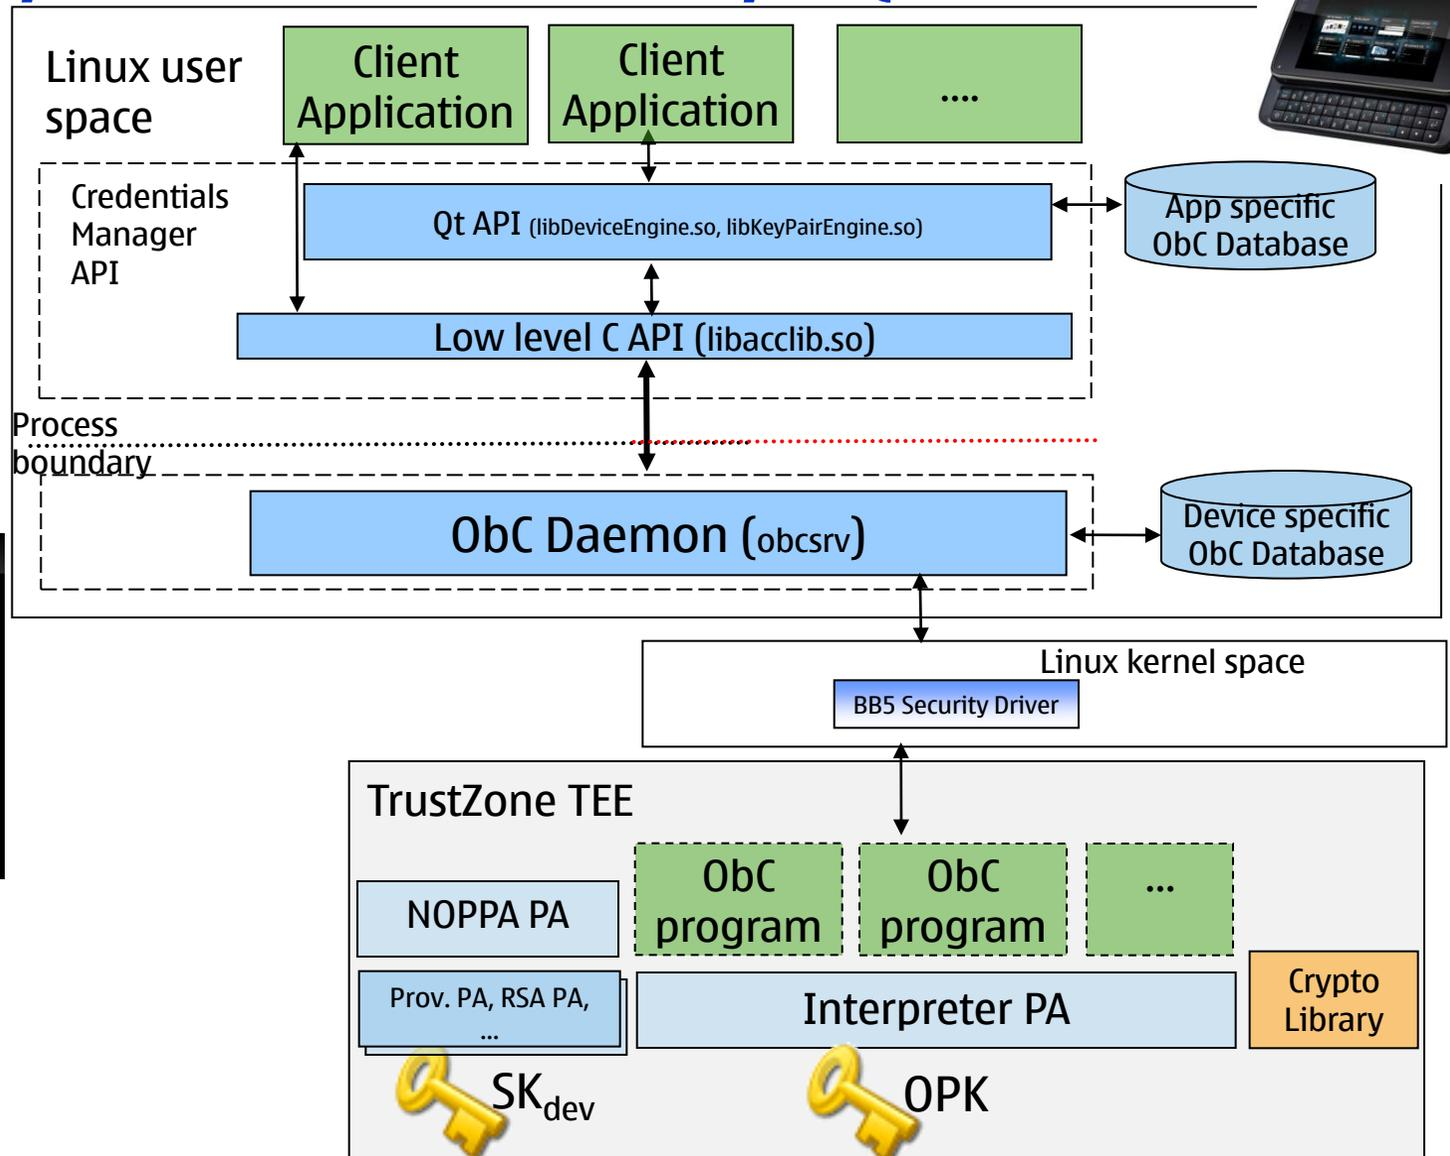


ObC for other platforms

- ObC for MeeGo Harmattan (N9) available in partially emulated mode (see later)
- Other platforms in the works...

Deployment considerations


Skip to [“ObCs in action”](#)

1. ObC: Full use of secure hardware

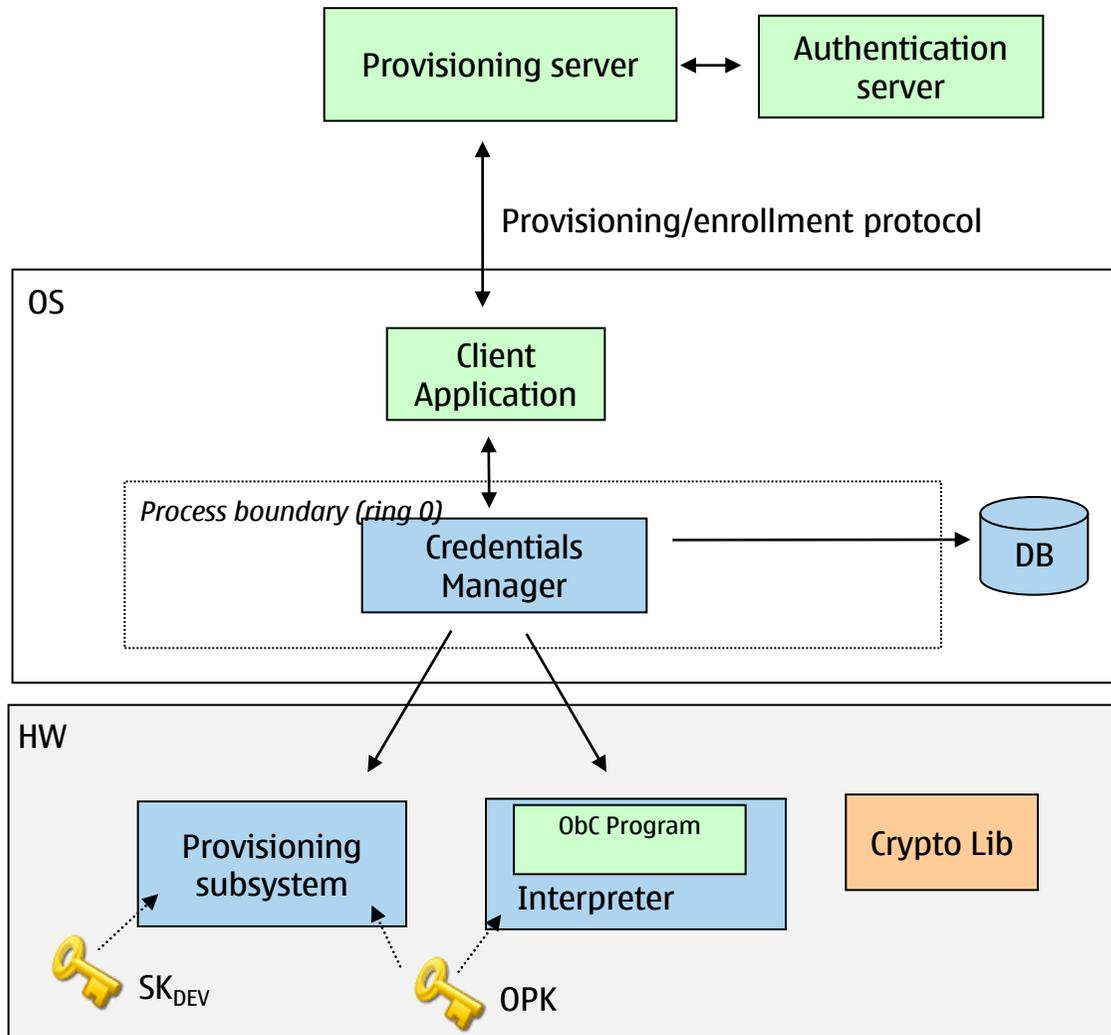


- ObC secret and algorithm (ObC program) protected by hw TEE
 - PK_{Dev} to protect provisioning or attestation
 - Secrets not accessible to OS
 - Cannot be copied between devices
 - Hardware attack typically destructive and device-specific
- Encrypted secret stored in Credentials Manager database
 - Can be backed up
- Example: Recent off-the-shelf Symbian devices (N8 and newer, OS version Anna and later)

2. ObC: Partial use of secure hardware

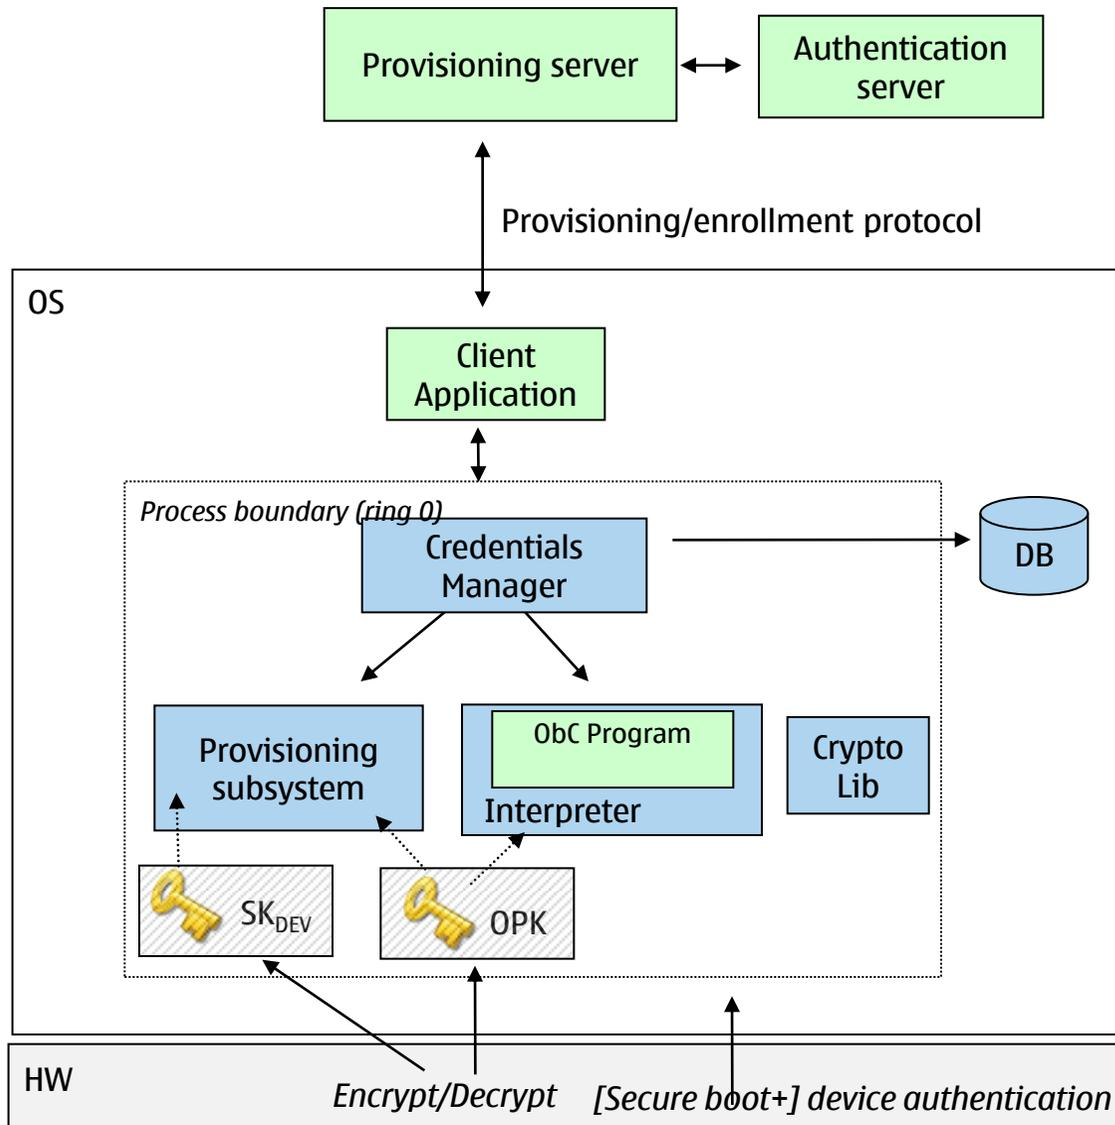

- ObC PAs emulated in the Credential Manager (OS process)
- Secure HW used to enable secure storage and device authentication
- ObC program runtime execution protected by OS platform security
- Example: MeeGo Harmattan (N9)


3. ObC: Fully emulated

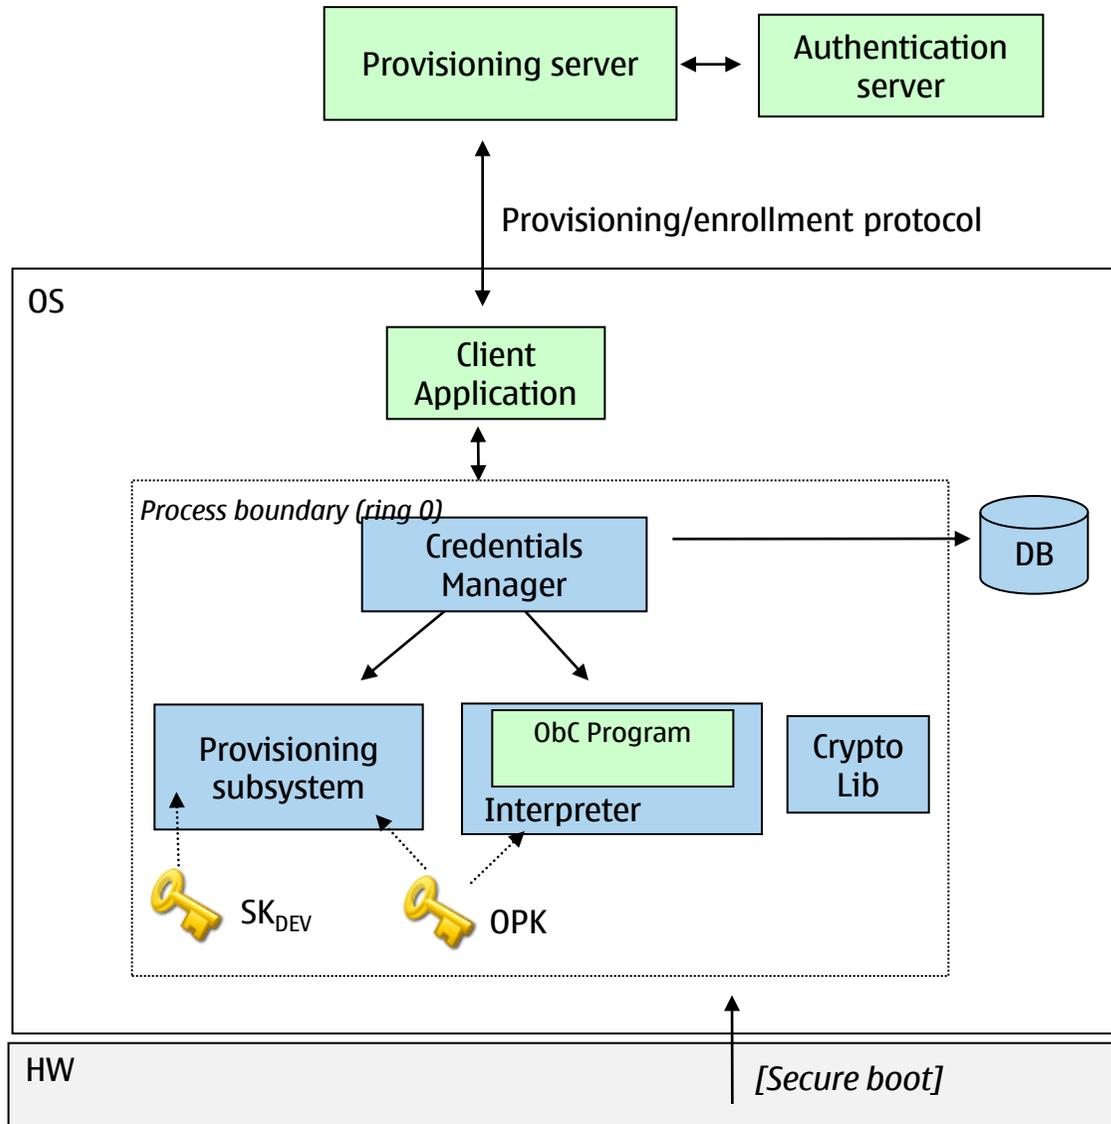

- ObC PAs emulated in the Credential Manager (OS process)
- Secure HW may be used for secure boot
- Storage ObC secrets and ObC program runtime execution protected by OS platform security
- No device authentication
- For debugging/development

ObC implementation supports all 3 variants

- Implementation contains code for emulating TEE PAs (interpreter+provisioning+crypto)
- Same software package can be installed in any device of the same type
 - automatically decides the variant to use
- (“PA” = “Protected Application” refers to code that runs in hardware TEE)

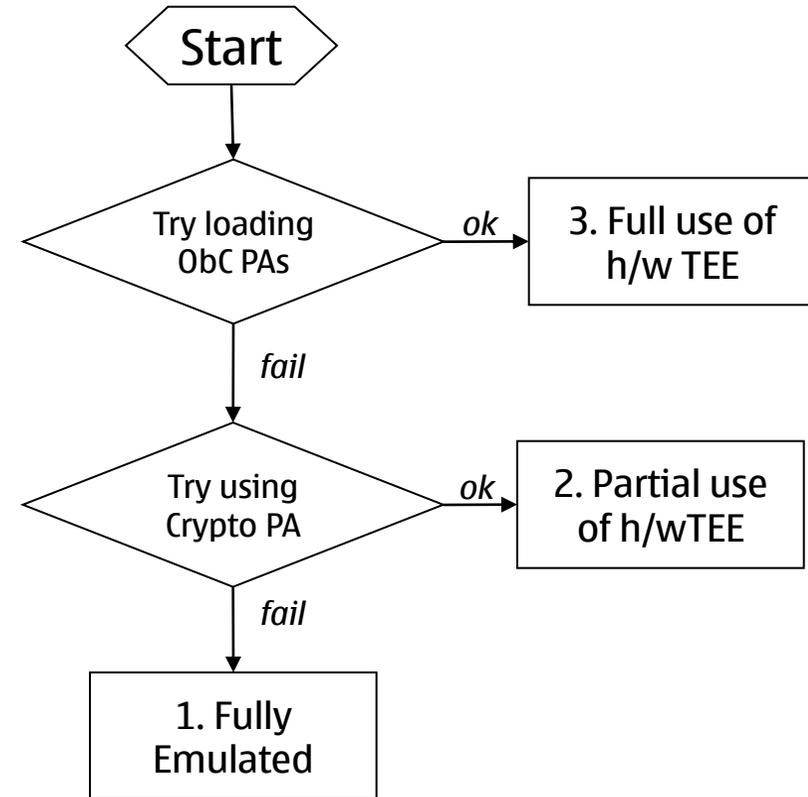


ObCs in action

Benefits of ObC

- Systematic means to expose useful TEE features (e.g., device authentication) to applications
- Portable programming platform over different chipset technologies for TEE code
- Means for 3rd-party development of credentials for TEE-equipped platforms

ObC Features

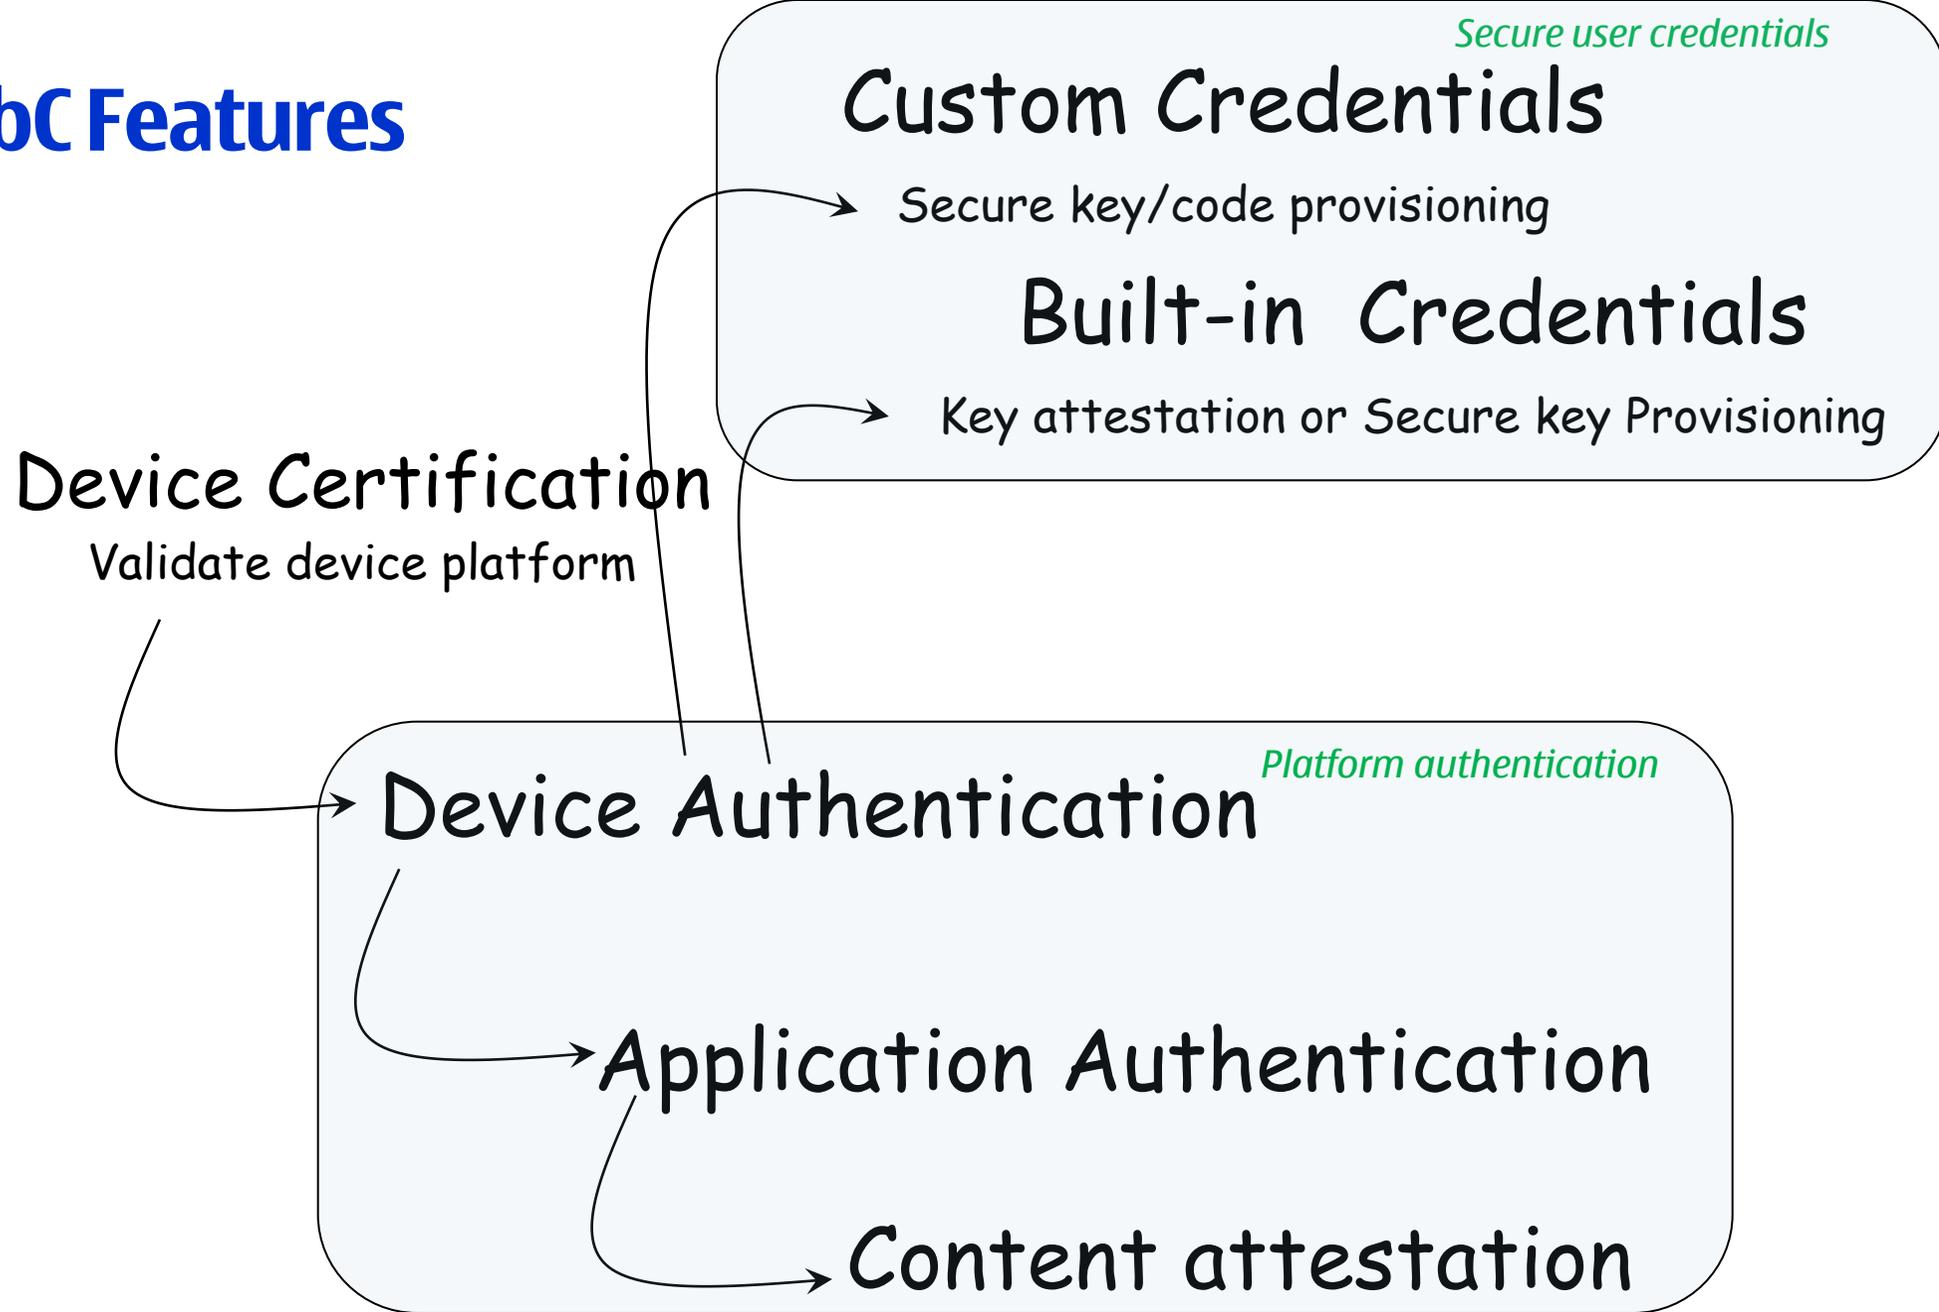

Target usage scenarios: Platform Authentication

Prove to a third party (e.g., external server)

- **Device authentication:** identity of device
 - E.g., CAPTCHA-avoidance, Comes-with-XYZ
- **Application authentication:** identity of application/process
 - E.g., Extended Web Service APIs for trusted apps
- **Content attestation:** type of content
 - E.g., Enforcing driver distraction rules in MirrorLink

Remote attestation problem



Attesting device



Verifier

What kind of software you are running?



Here is a certified statement of my current configuration (~ "measurements")



Access control decision

Example: MirrorLink system



Attesting properties, rather than configuration, is more useful

Traditional property-based attestation



Attesting device



Trusted Authority



Verifier

Defines properties
Defines mappings from
measurements to properties

list of properties

property certificates

Measure software configuration
Store **matching properties** into registers
Sign registers with certified key


signed **properties**, device certificate

Verify signature
Check properties

Sadeghi and Stüble, Property-based attestation for computing platforms: caring about properties, not mechanisms. Workshop on New Security Paradigms, 2004.

Attestation protocol

Application Identifier	Property
App1	P1, P2
App2	P3
...	...

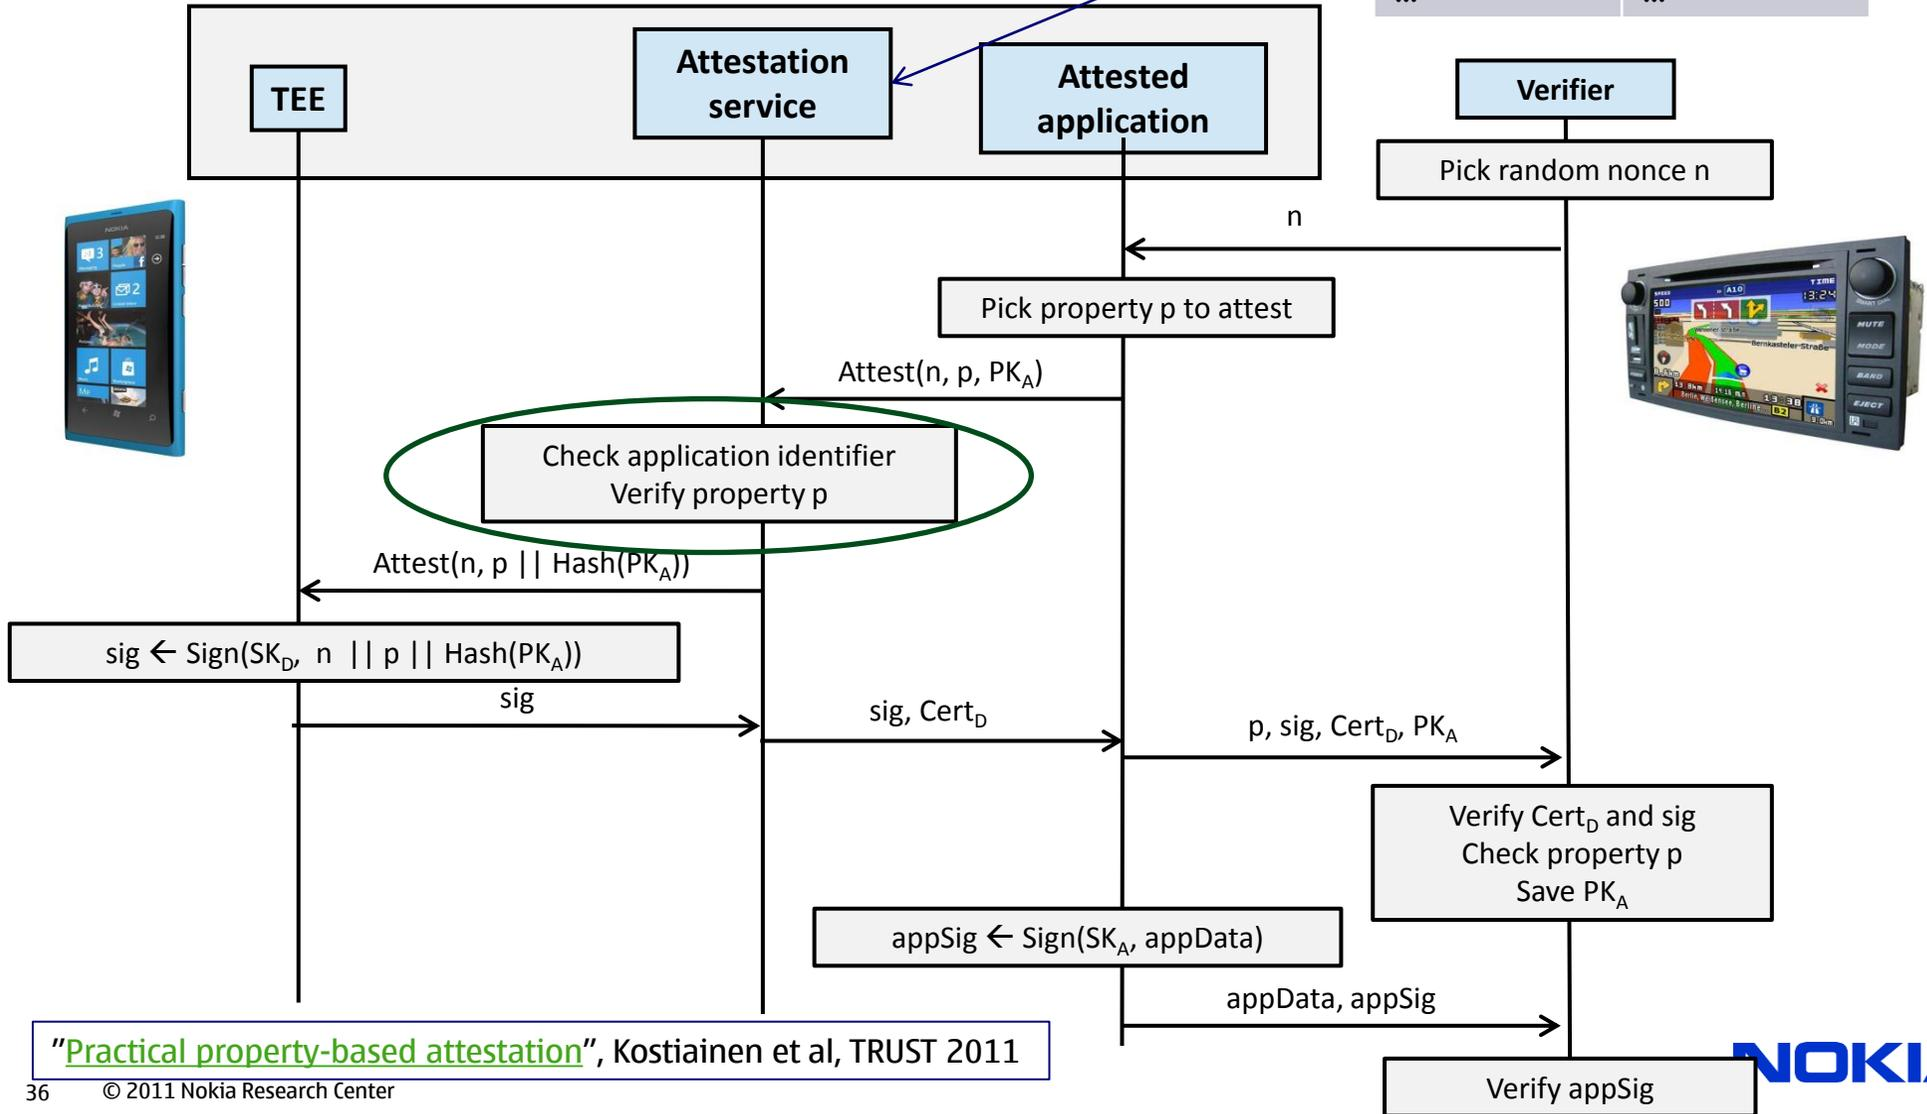

"Practical property-based attestation", Kostianen et al, TRUST 2011

Target usage scenarios: User Credentials

- Problem: provide the means to securely provision and store user credentials to user's personal device
- User benefits:
 - "no need to a bunch of different security tokens";
 - "digital credentials provisioned easily" (http, e-mail, ...)
- **Transport ticketing**
- **"Soft" tokens:** embedded SIM, embedded SecurID
- **Phone-as-smartcard:** use device-resident credentials from legacy PC apps (e.g., browsers, Outlook, VPN clients)
- **Physical access control (opening doors)**
- ...

An Example ObC: SecurID one-time password authentication



Joint research project with RSA security

Phone as smartcard (PASC)

- Applications use public key (PK) cryptography via standard frameworks
 - Crypto API (windows), Cryptoki (Linux, Mac), Unified Key/cert store (Symbian)
 - Agnostic to specific security tokens or how to communicate with them
- Any PK-enabled smartcard can be used seamlessly with PK-aware applications!



What if mobile phone can present itself as a PK-enabled smart card?

["Can hand-held computers *still* be better smartcards?"](#), Tamrakar et al, INTRUST 2010

ObC Status

ObC Status (1/2)

- Available on off-the-shelf Symbian devices
- Development environment for ObC programs (Windows, Linux)
 - Credential Manager and interfaces (native, *javascript*)
 - Available under limited license agreement for research and testing
- Available as an installable software package for MeeGo (N9)
 - Can be distributed as part of the same LLA
- Other platforms in the works


ObC Status (2/2)

- Related research
 - Support for piece-wise execution, sub-routines etc. (Ekberg et al, [STC 2009 paper](#))
 - How to split up ObC programs into smaller pieces securely?
 - Considerations of implementing crypto primitives (Ekberg et al, TRUST 2012 paper)
 - Is authenticated encryption secure even in pipelined mode?
 - Credential Migration, backup/restore (Kostiainen et al, [ACNS 2011 paper](#))
 - Balancing usability/security?
- Useful for several applications
 - Device authentication, financial services, secure messaging, ...
 - Pragmatic means to solve otherwise hard privacy/security problems in distributed computing (e.g., secure multi-party computation)

Limitations


- Open provisioning model
 - Liability and risk management
 - User interaction issues: e.g., Credential migration
- Certification and tamper resistance
 - Not comparable to high-end smart cards
- Will open-provisioning emerge as an alternative to centralized provisioning?

Standing on the shoulders of giants

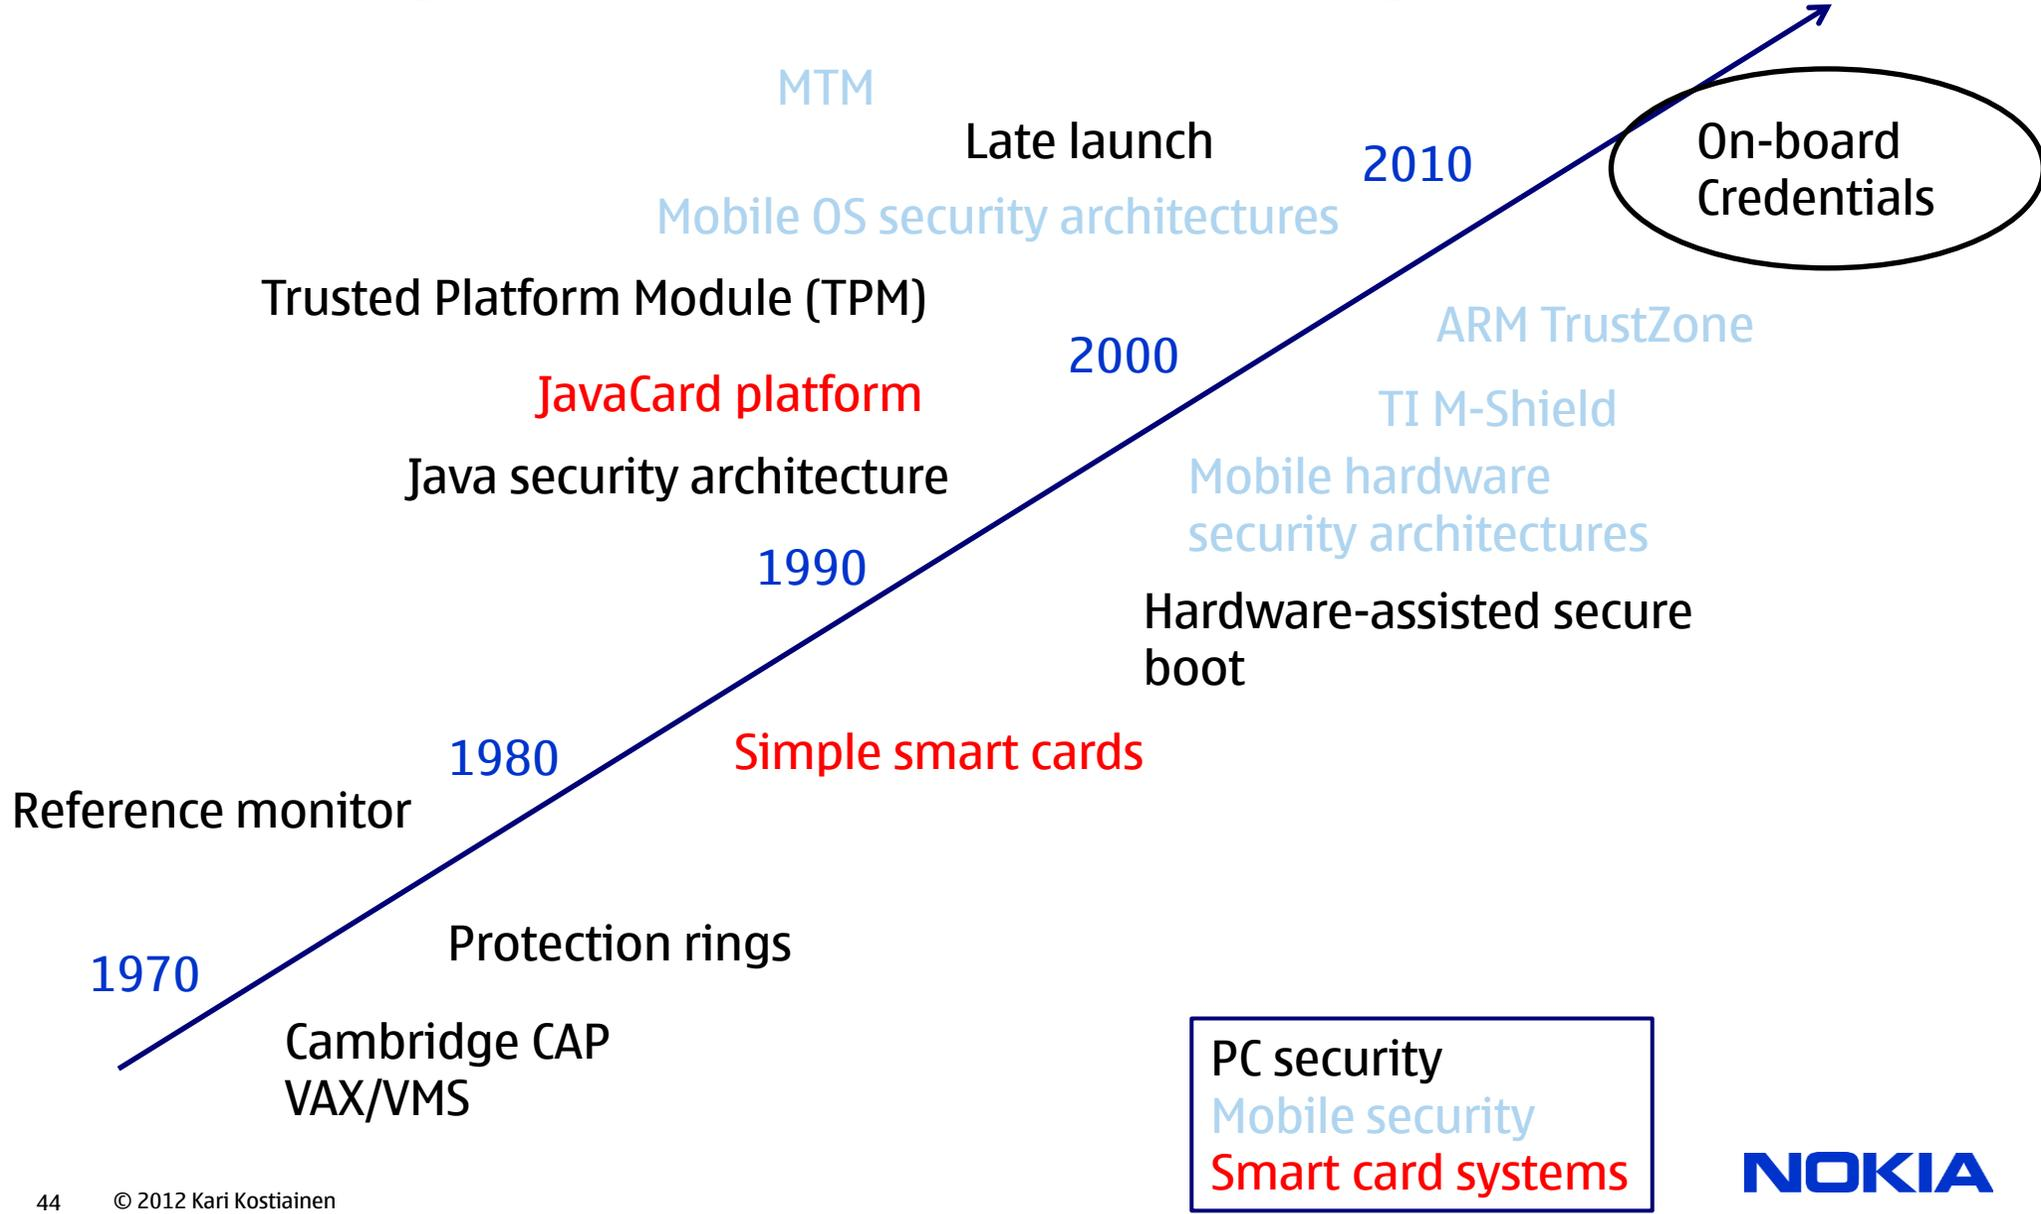

Summary

- On-board Credentials platform
 - inexpensive
 - open
 - secure
- Open provisioning systems can be a viable alternative to traditional closed systems
- **Available for you to build on**
 - <http://obc.nokiaresearch.com>
- A step towards the vision of a **personal trusted device**

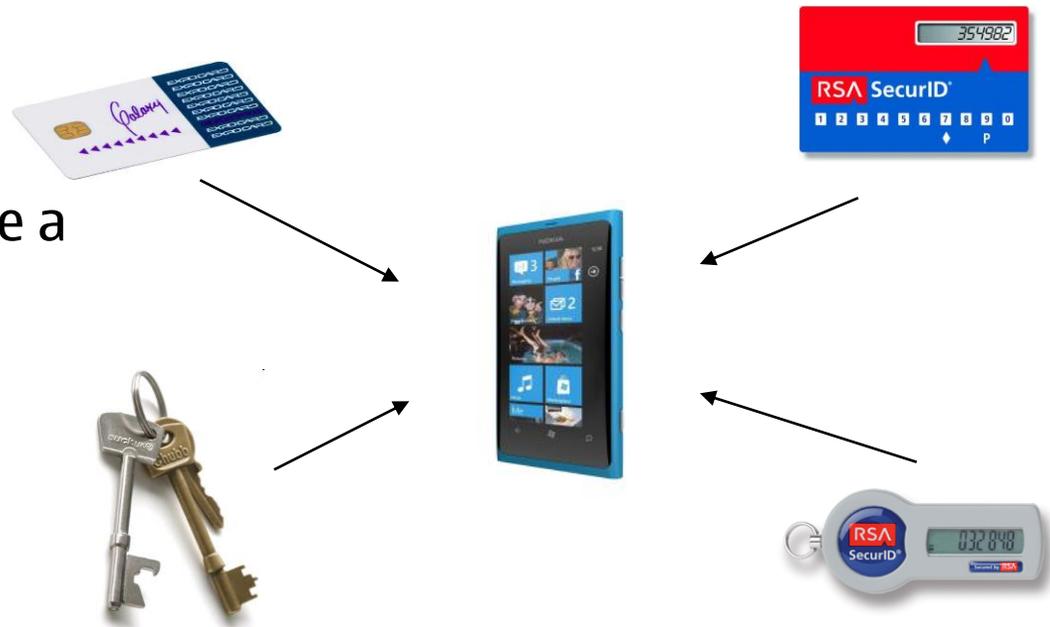

1. " [On-board Credentials: An Open Credential Platform for Mobile Devices](#)", Kari Kostainen, Dr. Tech dissertation, Aalto University
2. Forthcoming Dr. Tech dissertation, Jan-Erik Ekberg, Aalto University

How to make it possible to build trustworthy information protection mechanisms that are simultaneously **easy-to-use** and **inexpensive** to deploy while still guaranteeing **sufficient protection**?

